



1

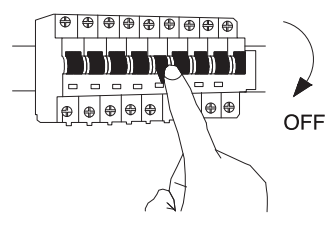


Turn off the general switch

2

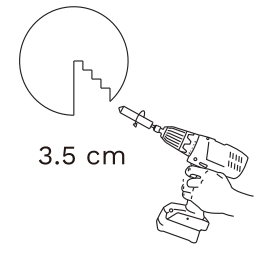


Create a CutOut


3

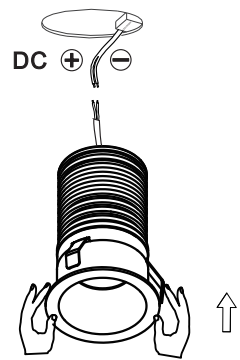

The cable connection has to be waterproof.  
Below one ways recommended.  
Accessories excluded for standard product.

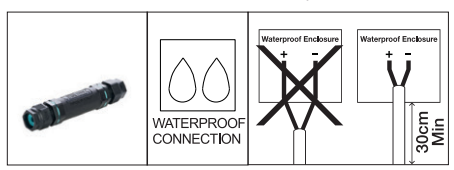

4



Completed installation



- A. The installation must be done by competent electricians.
- B. Product can not be modified
- C. Make sure the power has been switched off before installation
- D. The product is a Class III luminaire and shall be connected with a current driver according to the specifications in the above sheet
- E. When connecting more than one fixture, these are connecting in series, from plus to minus
- F. The connection of the luminaire should be standard with 0.5mm<sup>2</sup>-1.5mm<sup>2</sup> conductor.
- G. The specification for the driver means determines on the voltage and the maximum number of luminaires per loop
- H. Power should never be regulated on the secondary side
- I. See the installations on the image

