




1. Turn off the general switch




2. By rotating, break it apart




3. Brown (Active) connect it with marked "L"
Blue (Neutral) connect it with marked "N"
Green & yellow connect it with marked "↓"

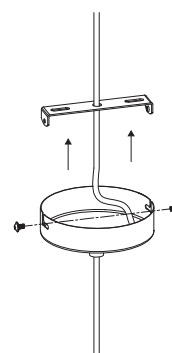


4. Fix the mounting bar and canopy with screw




5. Install the lamp shade



6. Fasten the plastic ring & install the bulb



7. Install the bulb



8. Turn on the general switch