



Turn off the general switch



Turn on the general switch

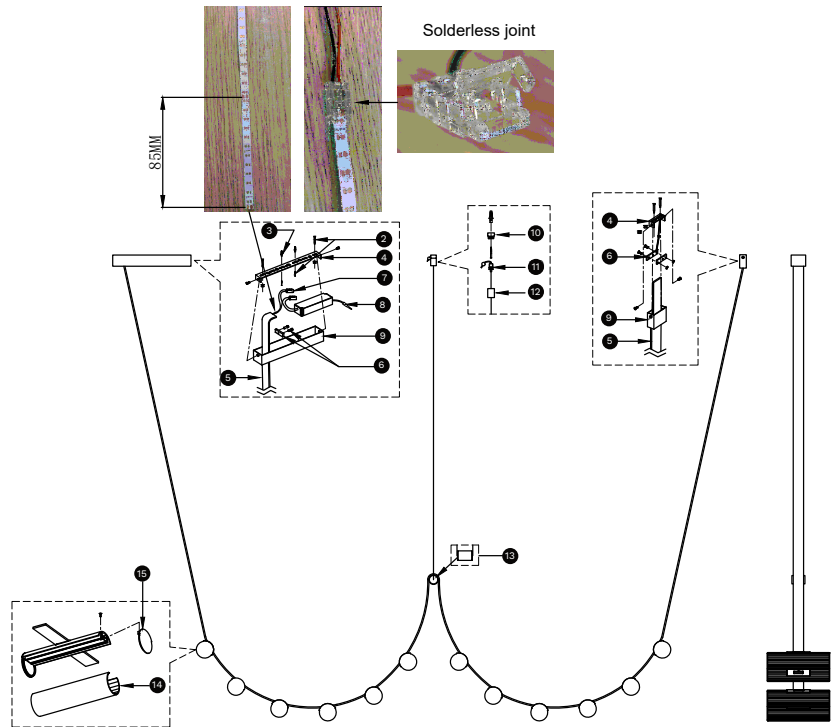

- |                                      |  |
|--------------------------------------|--|
| 1. Turn off general switch           | 9. 10. Apply the hanging element         |
| 2. Remove the nuts                   | 11. Adjust the wire                      |
| 3. Drill holes apply plastic anchors | 12. Put it in place                      |
| 4. Apply the nuts                    | 13. Adjust                               |
| 5. Apply the element in place        | 14. Apply the element                    |
| 6. Apply the nuts                    | 15. Apply the element with<br>The screws |
| 7. Connect the wires                 | 16. Turn on general switch               |
| 8. Get the cable through             |  |

### Belt Adjustment

1. Cut the belt at the lamp strip end (follow the marked + - spacing). The other end can be cut freely.
2. Adjust the wire rope tension head to the desired height.
3. Connect the lamp strip (+ -) to the no-welding head, align the thimble, and close the cover.

(Keeps key steps concise while removing redundancy.)



1. Please read the instruction sheet carefully before installing the lamps
2. In order to products, please use gloves when assembling the lamps.  
Don't scratch the surface to the products.
3. The lamps can't be used any longer if the cords of lamps are damaged.



Shut off the power ,before assembling the lamps. Make sure it's safe then Assemble the lamps strictly according to the instruction sheet. Our company Will not be responsible for any breakage caused by incorrect installation.