




1. Turn off the general switch




2. Rotate the metal cap to detach




3. Drill holes & apply plastic anchors & Screws

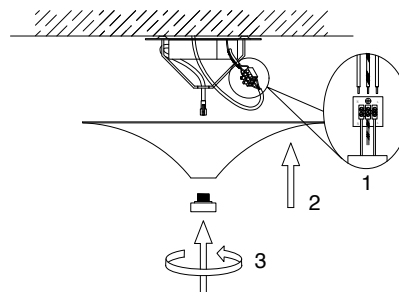

4. Connect the wires & rotate the metal cap

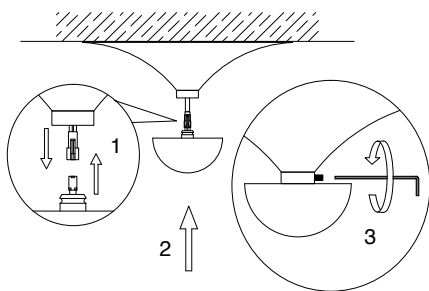

5. Connect the plug & fix in to place  
The cover with the metal cap



6. Turn on the general switch

